


# RL SX polyester filtering net - 50 micron washable cartridge

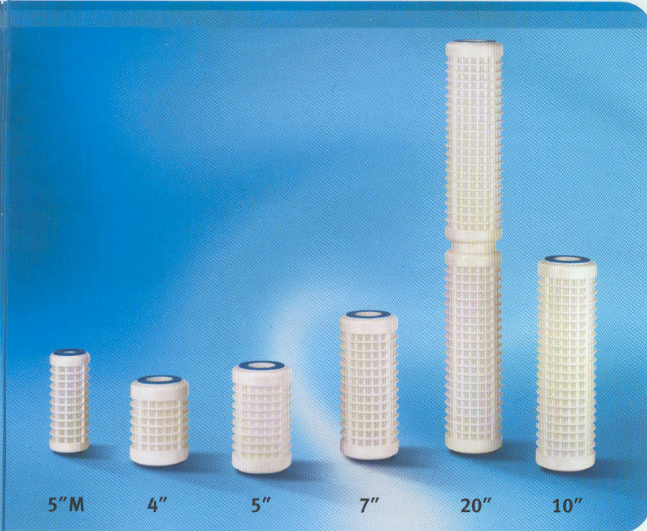

**APPLICATIONS**

**Filtration of:** sand, scales, rust.  
**Domestic use:** filtration of drinking water, protection of taps, boilers, washing machines and other installations.  
**Technical use:** pre-filtration for water-pumps, irrigation systems, protection of industrial installations.  
**Average life-span:** about 24 months.  
**Maintenance:** wash every 3 months.


**WORKING CONDITIONS**

Max working temperature \_\_\_\_\_ 45°C

**SPECIFICATIONS**

Non-toxic materials, suitable for drinking water.  
**Filtrating medium:** polyester net.  
**Armouring:** polypropylene.  
**End caps:** polypropylene.  
**Flat seals:** PVC.

suitable housing	cartridge model	cartridge height	mm			recommended flow rate l/h
			A	B	C	
Mignon	RL Mignon SX 50 mcr	5" M	122	50	20	500
Cadet	RL 4 SX 50 mcr	4"	92	70	30	650
Medium	RL 5 SX 50 mcr	5"	125	70	30	800
Junior	RL 7 SX 50 mcr	7"	173	70	30	1100
Senior	RL 10 SX 50 mcr	10"	250	70	30	1600
Master	RL 20 SX 50 mcr	20"	505	30	3000	

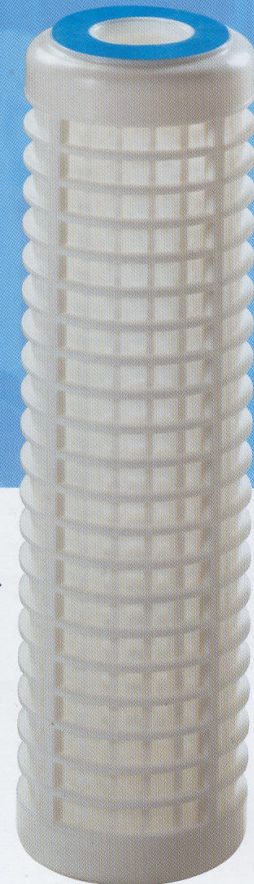

**VARIANTS** available on minimum quantity

Cartridges with different filtration rates.

